

033 24444



Volkswagen Aktiengesellschaft · 38436 Wolfsburg · Deutschland

Brieffach:

TNO
[REDACTED]

Van Mourik Broekmanweg 6
Postbus 49

2628 XE Delft

1773/0-wi-vB
9-23941
9-5723941

Ihre Zeichen
Ihre Nachricht
Unsere Zeichen
Durchwahl
Telefax
E-Mail

Datum

[REDACTED]
26. Juli 2012

In use compliance and real world emission test results of two Passat Diesel Euro 5b vehicles, TNO-060-DTM-2012-01373

Dear [REDACTED]

In response to the meeting held on the above subject at TNO on April, 4th we would like to give the following statements on the questions raised during the meeting.

Q1: Check the possibility to extract data from the CANbus regarding the EGR cooler temperature.

A1: The EGR cooler is not equipped with a temperature sensor, therefore there is no such signal in the CANbus.

Q2: Check if there are similar COP experiences regarding the NOx strategy.

A2: Please refer to the attached graphic indicating COP results of the Passat BlueMotion 1.6/77kW.

Q3: A description / explanation of the EGR system and a possible cause for the differences in the EGR strategy.

A3: Please refer to the attachment "Clarification of the EGR-Strategy".

Additional information on topics discussed during the meeting.

1. Background information on the consequences of restarting the engine during the test cycle.

Please refer to the attachment "What happens when the ignition is switched at 230 seconds?".

2. Comment on the conclusion of TNO regarding the reproducing of the CO2 results. Please refer to the attachment "CO2-figure reproducing".

Please feel free to contact us in case of any further need for clarification.



Volkswagen Aktiengesellschaft
38436 Wolfsburg
Deutschland
Telefon +49 (53 61) 9-0
Telefax +49 (53 61) 9-2 82 82
E-Mail vw@volkswagen.de

Ehrenvorsitzender des Aufsichtsrats:
Klaus Liesen

Vorsitzender des Aufsichtsrats:
Ferdinand K. Piëch

Vorstand:
Martin Winterkorn · Vorsitzender

Francisco J. Garcia Sanz
Jochem Heizmann
Christian Klingler
Michael Macht
Horst Neumann
Hans Dieter Pötsch
Rupert Stadler

Markenvorstand Volkswagen:
Martin Winterkorn · Vorsitzender

Arno Antlitz
Francisco J. Garcia Sanz
Ulrich Hackenberg
Christian Klingler
Werner Neubauer
Horst Neumann
Hubert Walth


Volkswagen Aktiengesellschaft
Sitz: Wolfsburg
Amtsgericht Braunschweig
HRB 100484



TNO-060-DTM-2012-02442

CoP results model year 2012


Passat BlueMotion 1,6/77kW

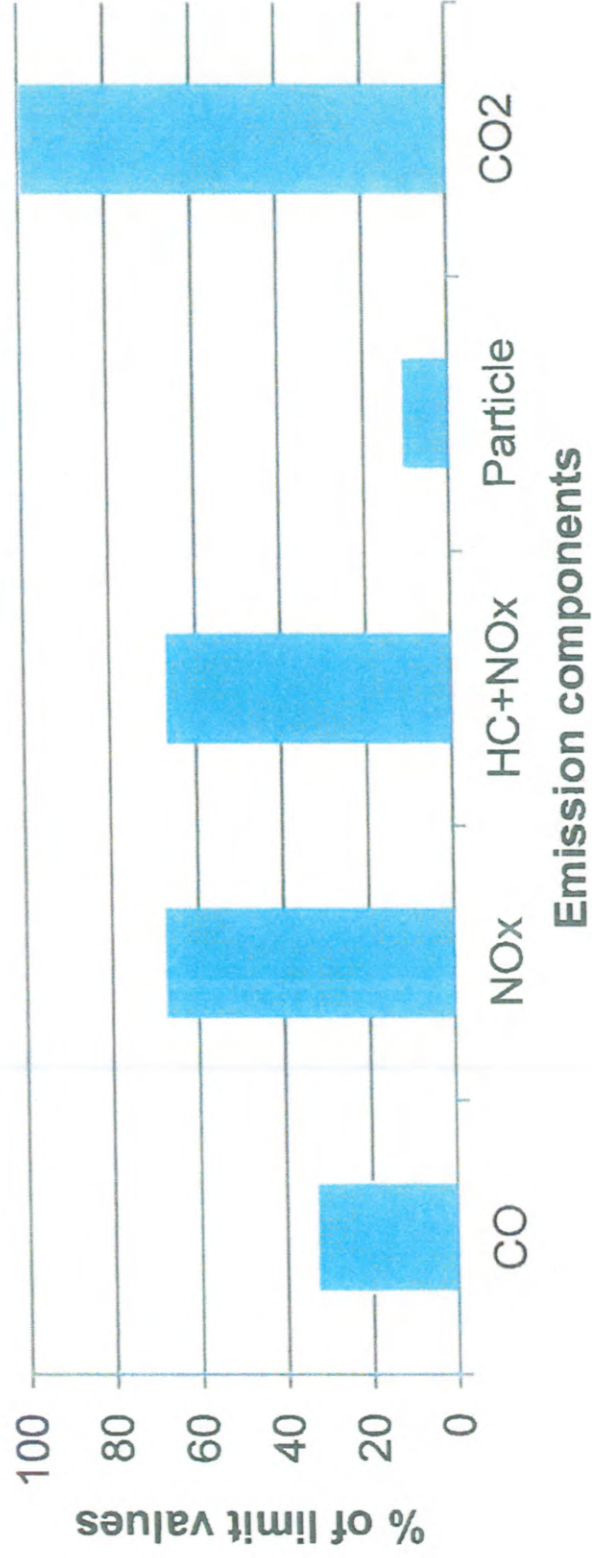


Clarification of the EGR-Strategy

Connection between EGR-Rate and engine load, speed and temperature

EGR capability reduces with increasing engine load and speed and in connection with the coolant temperature. Therefore the EGR rate is continuously amended to interpolated mapped values dependant on the engine load, speed and temperature. The EGR Rate depends on the position of the EGR valve and the pressure differential over the EGR routing. The engine management dictates the EGR valve position rather than the EGR rate. (CAN-Signal *EGR %*).

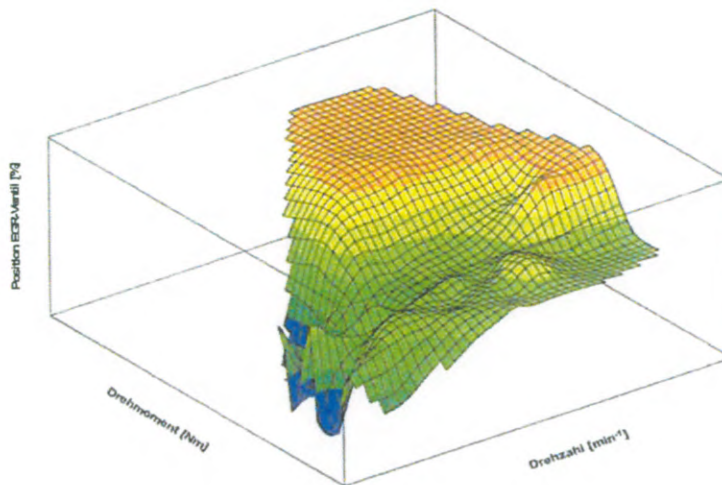

Graphic: Mapped position of the EGR valve for a cold engine

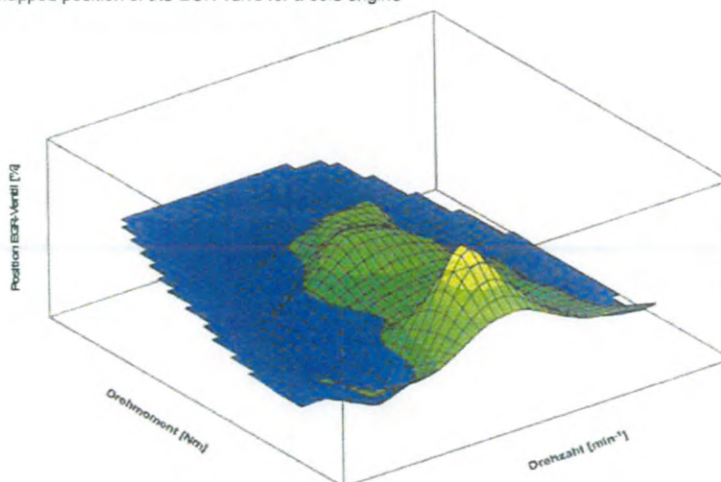

Graphic: Mapped position of the EGR valve for a warm engine

Dependency on coolant circuit

The cooling performance of the EGR cooler is dependent on the temperature of the coolant. The potential NO_x reduction is therefore also coolant temperature dependent and the EGR rate has to be modified in response to the coolant temperature.


Brief closing of the EGR valve during drive away

The EGR valve can be briefly closed at drive away in order to prevent excessive particulate emissions, improve driveability and to support the build-up of turbo pressure.

Closing of the EGR valve during overrun

During overrun the EGR valve will be closed to permit an OBD monitor of the air flow meter (no combustion, no influence on emissions). Due to the required level of precision, this monitoring is only performed with a fully warm engine.

Avoidance of acids and condensation

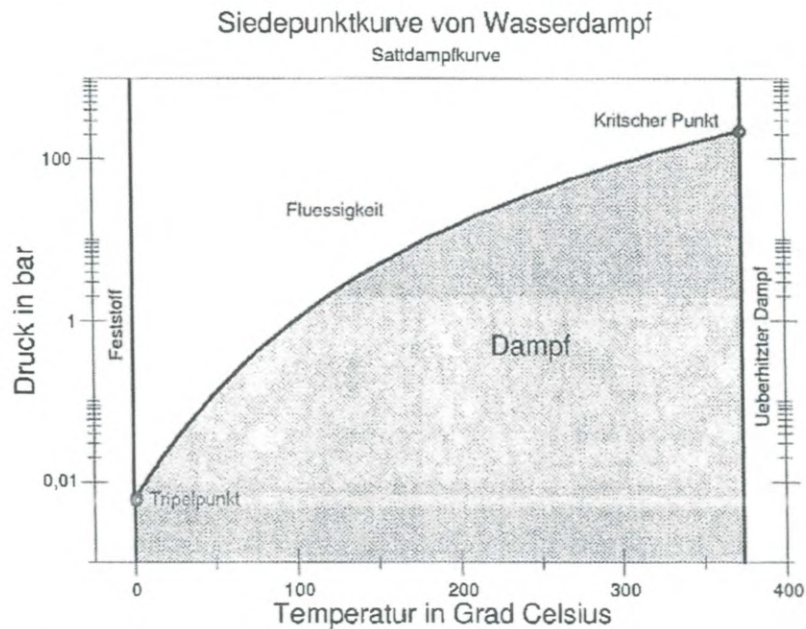

Graphic: Water status

Below the dew point there is a risk of production of chemically aggressive condensates in the EGR cooler, very small quantities of which can lead to component damage. These condensates are generated below 180°C. In order to fully prevent these products the EGR rate has to be modified and the EGR cooler bypass used in response to exterior temperature, coolant temperature and intake air temperature.

Varnish and soot accumulation

At low operating temperatures, products of combustion can be deposited on components, deteriorating their functionality. In order to avoid this deposition, the EGR rate has to be modified and the EGR cooler bypass used in response to exterior temperature, coolant temperature and intake air temperature.

Freezing

When the exhaust gas temperature is below the dew point there is the risk of water condensation which can form ice on cold components thereby disrupting their functionality. In order to prevent this the EGR rate has to be modified and the EGR cooler bypass used in response to exterior temperature, coolant temperature and intake air temperature..

What happens when the ignition is switched at 230 seconds?

The electrical heating of the lambda sensor may only be switched on when the sensor is dry and will remain dry in order to prevent damage through thermal stress. Therefore a model is started at engine start to predict whether water could be present in liquid form. Once the dew point has been reliably exceeded, the lambda sensor is released for use. Diesel engines need considerably more time for this dew point level recognition due to the mass and volume flow rates. If a drive cycle is ended with the ignition switch before the dew point has been exceeded, the risk of component damage due to condensate on the lambda sensor and other exhaust system components is elevated. Due to the higher aggressivity of warm condensates and the raised concentrations after repeated short drive cycles, the EGR rate also has to be adapted for repeated warm starts. In the case of repeated cold starts, the condensates are re-cooled and the base strategy can be retained. In regular start stop operation the engine ECU remains powered whilst the engine is off and continues to model water content and temperature. In this case the component protection mechanisms are considered.

CO2 figure reproducing

The different emissions in the emission test are not comprehensible to us. There is a difference in CO2 emissions of around 10% between the 5th and the 13th of December despite identical preconditioning according to the paperwork. Reasons could be implausible vehicle reactions due to non activated dyno mode in combination with inconsistent battery charge status. We rule out the influence of different types of pre conditioning.